

48x36 Standard Duty Pallet



Features & Benefits

- The design of the pallet includes a mixture of complex geometric shapes and varying wall thickness at critical load-bearing and wear-points which produces a longer life cycle and a superior strength-to-weight ratio
- The high pressure injection molding production process allows for precise tolerances to be met on every pallet which assures consistent product quality
- An engineered, co-polymer polypropylene (PP) material blend is used to produce the pallet which balances durability with rigidity requirements to ensure maximum performance
- Proprietary Snap-Lock™ design feature reduces damage from pallet jacks and other material handling equipment
- Tapered bottom edges on all four sides of the pallet allows for easy four-way entry and exit by automation and material handling equipment
- Full picture frame and cruciform bottom supports full edge racking and ensures the pallet works smoothly with conveying and automated pallet handling equipment
- Roughened top deck of the pallet helps reduce case slippage and enhance load stability

Options


- Colors: Standard, Customized, Non-Heavy Metal (NHM) and FDA Approved Colors
- Decoration: Single-Color, Multi-Color and Molded-In Branding
- Top Deck Surface: Light, Heavy or No Scuffing
- Perimeter Lip: Corner-Edge Lips
- Applied Technology: Bar Code, RFID and Proximity Marketing (NFC/QR Code) Enablement
- Material: UL® Listed Flame Retardant Resin Available



Corporate Headquarters
4010 East 26th St., Los Angeles, CA 90058
(800) 421-6244 • (323) 262-5145

Locations
Los Angeles, CA • Orlando, FL • Atlanta, GA • De Soto, KS
Erie, PA • Dallas, TX • Kenosha, WI • Quebec, Canada
Querétaro, Qro., Mexico

Web: www.rehrigpacific.com

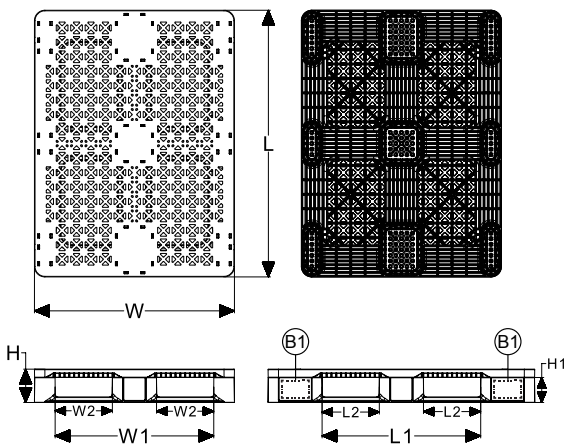

Specifications	IN/LB	MM/KG
Length (L)	48	1,219
Width (W)	36	914
Height (H)	6.0	152
Overall Fork Pocket Width (W1)	28.5	724
Individual Fork Pocket Width (W2)	10.3	262
Overall Fork Pocket Length (L1)	28.5	724
Individual Fork Pocket Length (L2)	10.3	262
Fork Pocket Height (H1)	3.5	89
Weight	41.5	18.8
Static Load Rating	30,000	13,608
Dynamic Load Rating	4,000	1,814
Maximum Edge Rackable Load	2,400	1,090
53' Trailer Quantity	612	

Decoration Areas	WIDTH (IN)	HEIGHT (IN)
Brand, Barcode or RFID Area (B1)	4.0	2.0